
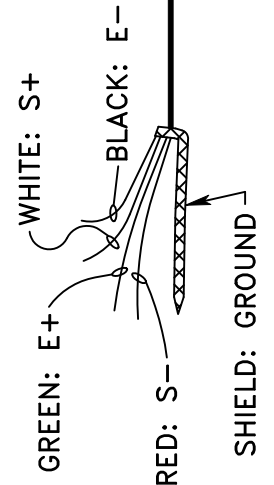


10FT. 4 COND.  
30 AWG SHIELDED  
PTFE INSULATED  
CABLE TO INTERFACE  
WITH SIGNAL CONDITIONER/  
INDICATOR

SENSOR COVER  
PROVIDES  
OVERLOAD  
PROTECTION

VARIETY OF ROLLERS  
AVAILABLE. U-/V- GROOVE  
AND WEB/FILM/TAPE  
CYLINDRICAL TO 1.50 DIA.

SENSOR DIRECTION  
OF FORCE: DOWN

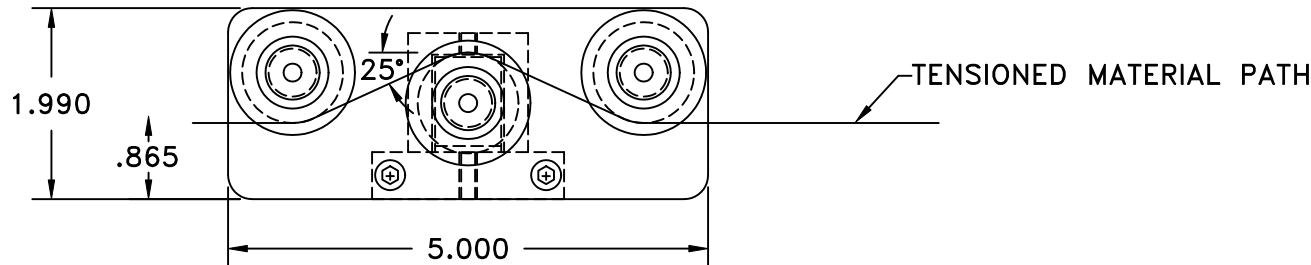

**RANGES TO 5000 GRAMS**

**TMI Tension Measurement, inc**

Colorado, USA • Tension-Measurement.com  
TEL (303) 465-1011 • FAX (303) 466-9761

**MPB SERIES TENSION SENSOR  
WITH 5" WIDE FACEPLATE**

PART NO:  
MPB5-SERIES

MATERIAL: BLACK HARD  
ANODIZED ALUMINUM

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:  
U.S.O.  
1 PLC. DEC. ±.030  
2 PLC. DEC. ±.015  
3 PLC. DEC. ±.005  
ANGULAR ± 30"

SCALE: 1 = 2

DATE: 4-2001

BY: TMI