
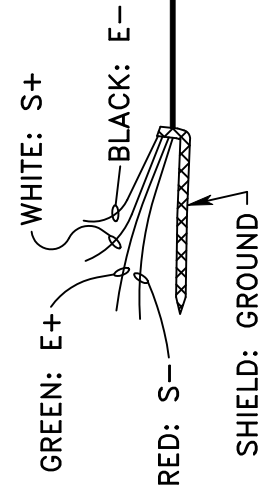


10FT. 4 COND.  
30 AWG SHIELDED  
PTFE INSULATED  
CABLE TO INTERFACE  
WITH SIGNAL CONDITIONER/  
INDICATOR

SENSOR COVER  
PROVIDES  
OVERLOAD  
PROTECTION

VARIETY OF ROLLERS  
AVAILABLE. U-/V- GROOVE  
AND WEB/FILM/TAPE  
CYLINDRICAL TO 1.50 DIA.

SENSOR DIRECTION  
OF FORCE: DOWN

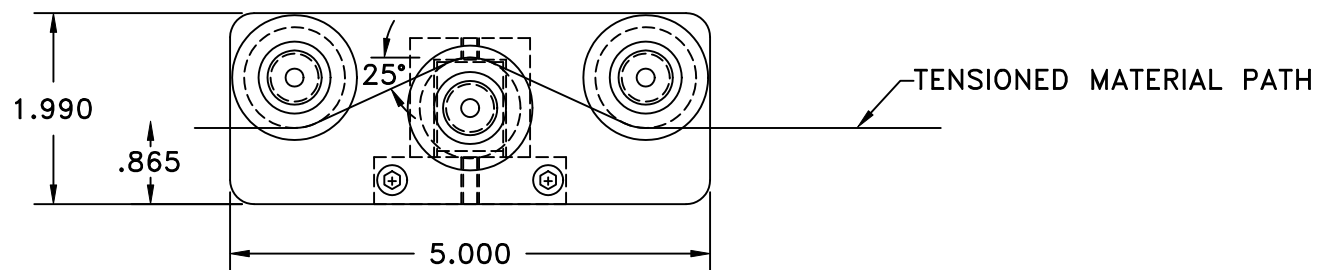

**RANGES TO 5000 GRAMS**

**TMI Tension Measurement, inc**  
Colorado, USA • [Tension-Measurement.com](http://Tension-Measurement.com)  
TEL (303) 465-1011 • FAX (303) 466-9761

**MPB SERIES TENSION SENSOR  
WITH 5" WIDE FACEPLATE**  
PART NO: MPB5-SERIES  
MATERIAL: BLACK HARD ANODIZED ALUMINUM

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
U.S.O.  
1 PLC. DEC. ±.030  
2 PLC. DEC. ±.015  
3 PLC. DEC. ±.005  
ANGULAR ± 30"

SCALE: 1 = 2  
DATE: 4-2001  
BY: TMI