


5/16-18, 3/8-16 OR 1/2-13 TAPPED MOUNTING HOLE TYPICAL IN END OF SENSOR TO ACCOMMODATE A VARIETY OF ROLLERS FOR WEBS, BELTS, CABLES, WIRES, ETC.

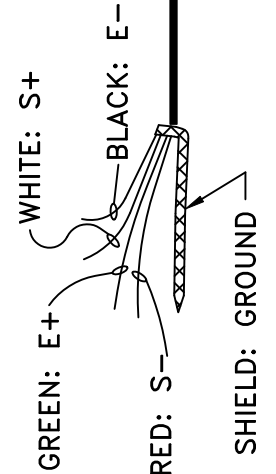

* SENSOR MAY BE MOUNTED IN ANY POSITION/ORIENTATION AS LONG AS DIRECTION OF FORCE IS MAINTAINED.

**RANGES: 0-75 LB, UP TO 0-250 LB
(WRAP ANGLE AND ROLLER WEIGHT DEPENDENT)**

TMI Tension Measurement, inc
Colorado, USA • Tension-Measurement.com
TEL. (303) 465-1011 • FAX (303) 466-9761

CANTILEVER MOUNT TENSION SENSOR

PART NO.
MPC3 SERIES

MATERIAL:
ALUMINUM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
U.S.O.
1 PLC. DEC. ±.030
2 PLC. DEC. ±.015
3 PLC. DEC. ±.005
ANGULAR ± 30"

SCALE: 1 = 2
DATE: 11-1999
BY: TMI